


EcoSpec[®] Landscape Accent

Line Voltage

Installation Guide



IP65

RoHS
COMPLIANT



Included in Box

EcoSpec Landscape Accent Line Voltage
Installation Guide

Optional Items

Mounting Stake:
ES06-A-STK-UL-1
ES06-A-STK-CE-1

Additional Items Needed

Junction Box



EcoSense Lighting fixtures must be installed by a qualified electrician.
EcoSense Lighting, Inc. is not responsible if its fixtures are not installed in accordance with all national and local safety standards.



Plan the Installation

Verify the Electrical Plan

The fixtures must be mounted to a UL listed junction box or landscape post.
Use direct burial (DBR) waterproof splice wire connectors.

Select Mounting Option

Choose the method best suited for the installation application.

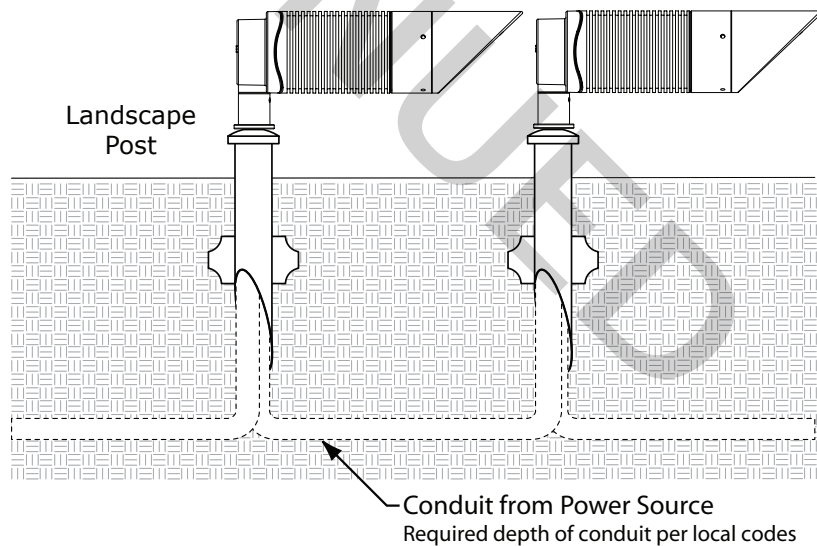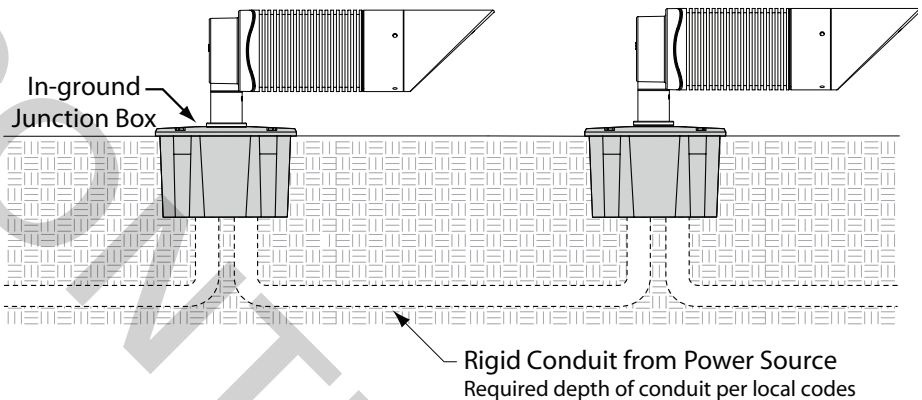

EcoSense Lighting Inc.

80 Broad Street
5th Floor
New York, NY 10004

www.ecosenselighting.com

Phone 212.228.8118
Fax 212.228.9113
Toll Free 855.632.6736
855.6.ECOSEN

ECOSENSE[®]

Install the Fixtures

Installation Considerations


Power Consumption	120VAC: 7.1 watts ; 220VAC: 7.7 watts
Operating Temperature	-4°F to 104°F (-20°C to 40°C)
Operating Voltage	100-120VAC / 220-240VAC, 50-60Hz
Weight	16 oz/453g
Dimensions	W 3.1" x D 2.2" x L 8" / (78.5 mm x 57 mm x 203 mm)



Ensure power is OFF

Connect Fixtures and Power

Wiring must be in accordance with all state and local codes.

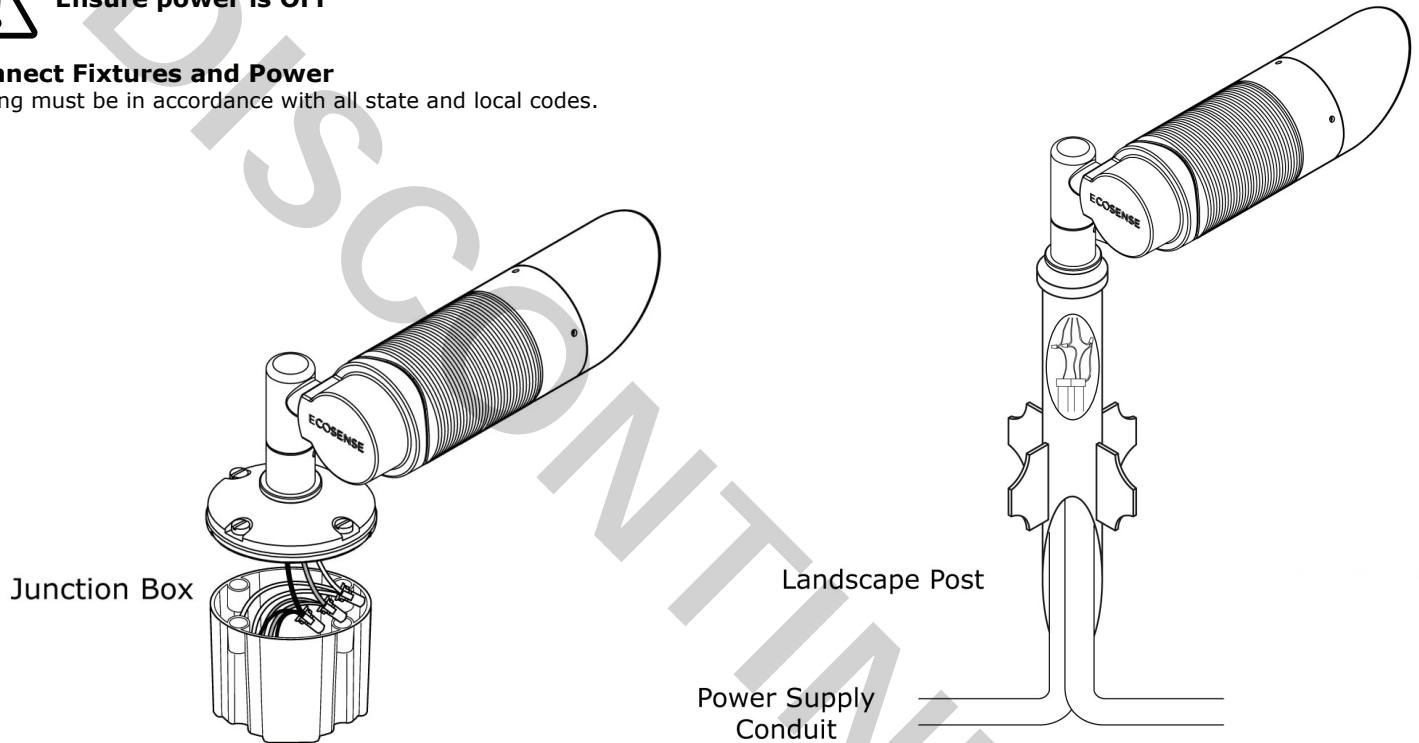

Read and understand the installation instructions before attempting to install or use the fixture.

Only use fixtures with voltage for which it is rated. Do not exceed the specified voltage and current input.

Do not use fixture if the housing, lens, or power cable are damaged.

Fixtures have line voltage risk of shock and no user serviceable parts. Do not attempt to open.

Do not hot swap. Ensure that power is off before connecting or disconnecting fixtures in the series.

Ensure that main power supply is off before installing or wiring a fixture.

Always switch off the electricity supply at the mains during installation and maintenance. Before installing, please prepare terminal block which is suitable for 2x1.0mm² H05RN-F connecting leads and supply cord installed by client and IP67 terminal block box. (NOT INCLUDED IN THIS UNIT)

LED Radiation. Do not view directly with optical instruments. Class 1M LED Product