



## Install the Fixtures

# EcoSpec® Linear HP EXT Wall Wash EcoSpec® Linear HP EXT Wall Wash Mono-Color

### Installation Considerations

Power Consumption (Max)	White: 17 watts (1ft) / 68 watts (4ft) Mono Color: 17 watts (1ft) / 68 watts (4ft)
Operating Temperature	Not exceeding 122°F (50°C)
Operating Voltage#	100 – 120VAC, 277VAC, 50-60Hz
Rating	UL Certified for Wet Location
Weight	2.43lbs /1.1kg (1ft); 10.4lbs /4.7kg (4ft)
Dimensions	W 3.1" x H 2.7" x L 12"/48" (79.5 mm x 67,7 mm x 305mm/1,219 mm)


# 11LC-XX-YY-120-ZZ and 11LC-XX-YY-277-ZZ represent 100-120Vac and 277Vac input voltage respectively, where XX, YY, ZZ represent length, CCT and optic respectively.



**Ensure power is OFF**

### Connect Fixtures and Power

From the leader cable, attach fixtures in-line, end-to-end. Use jumper cable to create space between fixtures. Use terminator in last fixture in each run. Attach feeder cables to power supply.

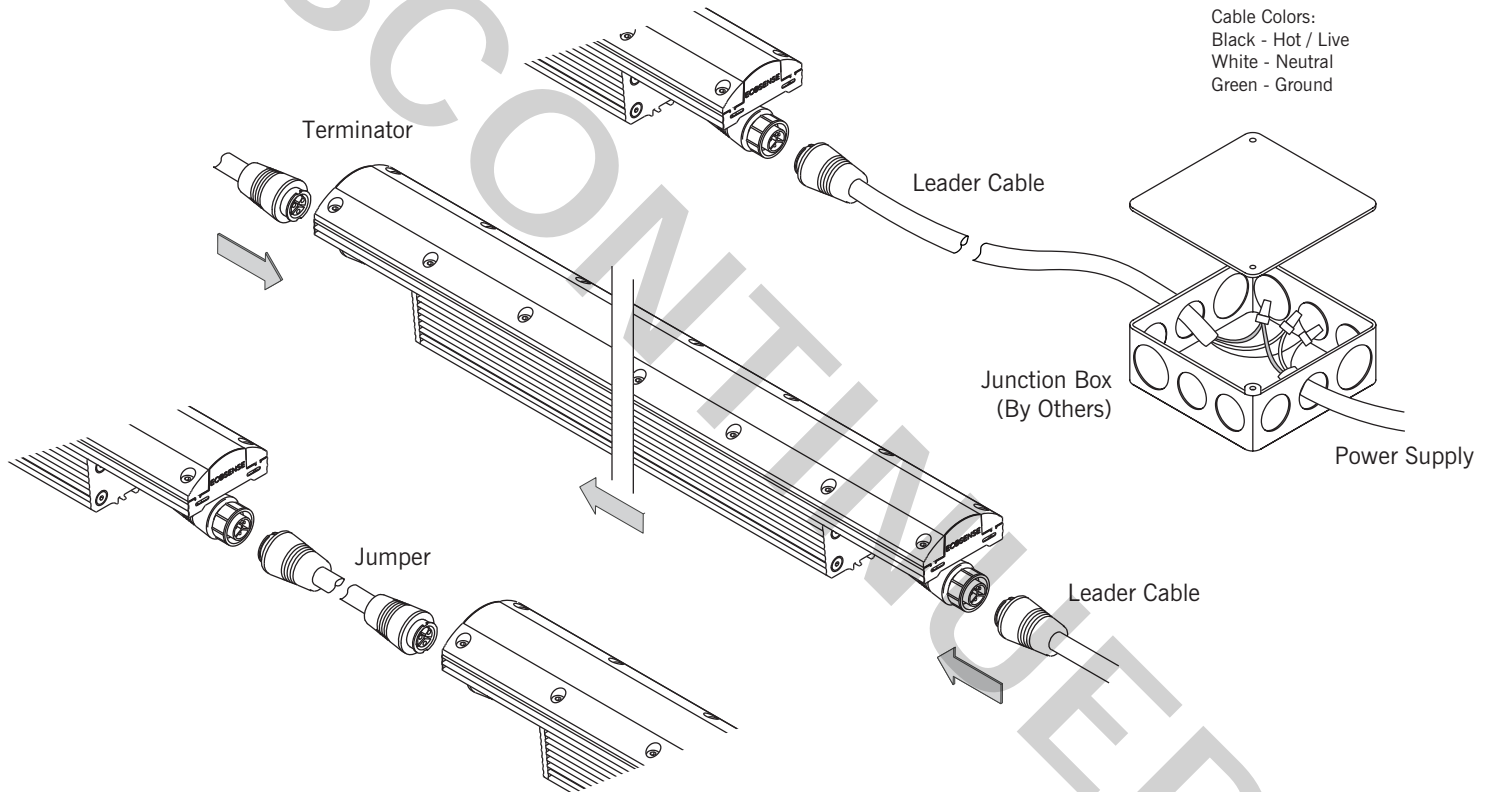

### Remarks:

The user/installer shall provide a UL compliant junction box, strain relief and metal conduit to meet the installation requirements for the electrical connection



- Read and understand the installation instructions before attempting to install or use the fixture.
- Only use fixtures with voltage for which it is rated. Do not exceed the specified voltage and current input.
- Do not use fixture if the housing, lens, or power cable are damaged.
- Fixtures have line voltage risk of shock and no user serviceable parts. Do not attempt to open.
- Do not hot swap. Ensure that power is off before connecting or disconnecting fixtures in the series.
- Ensure that main power supply is off before installing or wiring a fixture.
- LED Radiation. Do not view directly with optical instruments. Class 1M LED Product
- Polycarbonate Chemical Warning:  
Please contact an EcoSense sales representative for a complete list of chemicals that can cause damage to polycarbonate lenses and silicone gaskets. EcoSense must not be held responsible for damage to, or failure of, fixtures where any of these, or chemicals of similar nature and makeup, are applied intentionally or inadvertently to EcoSense's fixtures.

© 2012 EcoSense Lighting Inc. All rights reserved.

Specifications subject to change without notice.

Visit [www.ecosenselighting.com](http://www.ecosenselighting.com) for the most current specifications.

EcoSense, the EcoSense logo, and EcoSpec are trademarks of EcoSense Lighting Inc.

[www.ecosenselighting.com](http://www.ecosenselighting.com)

(V. 03.25-2013)

ECOSENSE®