

## RISE MULTI-HEAD PART NUMBER DESIGNATION

Must be submitted with all Multi-Head orders where heads have difference configurations.

### PROJECT INFORMATION

Date: \_\_\_\_\_

Project Name: \_\_\_\_\_

EcoSense Quote #: \_\_\_\_\_

Distributor's Company Name: \_\_\_\_\_

Distributor's PO #: \_\_\_\_\_

Specifier's Name: \_\_\_\_\_

Specifier's Location: \_\_\_\_\_

### SHIPPING INFORMATION

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_

State: \_\_\_\_\_

Zip Code: \_\_\_\_\_

Phone #: \_\_\_\_\_

## RISE SPECIFICATION AND PART NUMBER DESIGNATION

CRI and Finishes must be the same for all heads.

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR  | CRI                               | BEAM ANGLE                  | FINISHES                     | ACCESSORIES      | WIRING AND MOUNTING  |
|---------------|-----------------|--------------------|------------|-----------------------------------|-----------------------------|------------------------------|------------------|--|
| F080          | 2V              | LO - Low Output    | 22 - 2200K | 8 - 80                            | 05 - Laser Spot (5°)        | K - Black                    | X - No Accessory | C - 10' External Cable Bottom Exit; Surface Mount - 1/2" NPT : UL/CE Rated |
| F170          | 2H              | MO - Medium Output | 25 - 2500K | 9 - 90*                           | 10 - Very Narrow Spot (10°) | Z - Bronze                   | H - Half Snoot   |  |
|               | 4M              | HO - High Output   | 27 - 2700K | X - For RD, GR, BL, AM            | 15 - Narrow Spot (15°)      | S - Silver                   | F - Full Snoot   |  |
|               | 4F              | Output             | 30 - 3000K |                                   | 20 - Spot (20°)             | W - White                    | C - Custom       |  |
|               | 5T              | Output             | 35 - 3500K |                                   | 40 - Flood (40°)            | C - Custom*                  |                  |  |
|               | 5B              | Output             | 40 - 4000K | *90 CRI not available             | 60 - Wide Flood (60°)       |                              |                  |  |
|               |                 |                    | 50 - 5000K | in 2200K, 2500K, 5000K, and 6500K | 80 - Very Wide Flood (80°)  | *Select color at Pantone.com |                  |  |
|               |                 |                    | 65 - 6500K |                                   | E1 - Elliptical 1 (15°x60°) |                              |                  |  |
|               |                 |                    | RD - Red   |                                   | E2 - Elliptical 2 (30°x60°) |                              |                  |  |
|               |                 |                    | GR - Green |                                   | E3 - Elliptical 3 (60°x15°) |                              |                  |  |
|               |                 |                    | BL - Blue  |                                   | E4 - Elliptical 4 (60°x30°) |                              |                  |  |
|               |                 |                    | AM - Amber |                                   |                             |                              |                  |  |



### F080 DUO (F080-2V)

FILL IN YOUR PART #:

**F080-2V-POWER-CCT-CRI-BEAM ANGLE-FINISH-ACCESSORIES-WIRING**

| FINISHES | CRI   | NOTES: |
|----------|-------|--------|
| _____    | _____ | _____  |
| _____    | _____ | _____  |

#### HEAD #3

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F080          | 2V              |                    |           |            |             | C                   |

#### HEAD #4

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F080          | 2V              |                    |           |            |             | C                   |

ECOSENSE LIGHTING INC.  
837 NORTH SPRING STREET  
SUITE 103  
LOS ANGELES CA, 90012


P • 310.496.6255  
F • 310.496.6256  
T • 855.632.6736  
855.6.ECOSEN

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. VISIT [ECOSENSELIGHTING.COM](http://ECOSENSELIGHTING.COM) FOR THE MOST CURRENT SPECIFICATIONS. FOR A LIST OF PATENTS VISIT [ECOSENSELIGHTING.COM/IP-PORTFOLIO/](http://ECOSENSELIGHTING.COM/IP-PORTFOLIO/)  
©2017 ECOSENSE LIGHTING INC. ALL RIGHTS RESERVED. ECOSENSE, THE ECOSENSE LOGO, TROV, TROV AND ECOSPEC ARE REGISTERED TRADEMARKS OF ECOSENSE LIGHTING INC.  
RISE®, SLIM COVE™, FREEDOM TO CREATE™, MACRO™, FLIP-TO-FLAT™ ARE TRADEMARKS OF ECOSENSE LIGHTING INC.

[ECOSENSELIGHTING.COM](http://ECOSENSELIGHTING.COM)

1/6

ORDERING

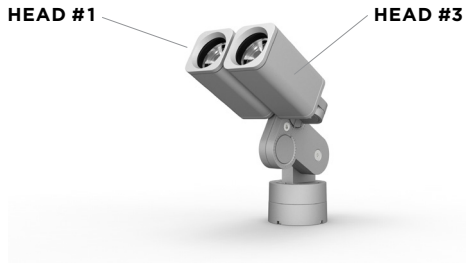

**F080-DUO (F080-2H)**

FILL IN YOUR PART #:

**F080-2H-POWER-CCT-CRI-BEAM ANGLE-FINISH-ACCESSORIES-WIRING**


|                 |            |               |
|-----------------|------------|---------------|
| <b>FINISHES</b> | <b>CRI</b> | <b>NOTES:</b> |
|                 |            |               |
|                 |            |               |

**HEAD #1**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F080          | 2H              |                    |           |            |             | C                   |

**HEAD #3**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F080          | 2H              |                    |           |            |             | C                   |

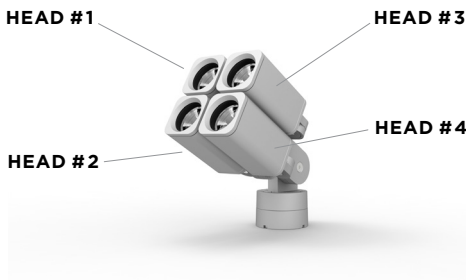

**F080-QUAD (F080-4M)**

FILL IN YOUR PART #:

**F080-4M-POWER-CCT-CRI-BEAM ANGLE-FINISH-ACCESSORIES-WIRING**

|                 |            |               |
|-----------------|------------|---------------|
| <b>FINISHES</b> | <b>CRI</b> | <b>NOTES:</b> |
|                 |            |               |
|                 |            |               |

**HEAD #1**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F080          | 4M              |                    |           |            |             | C                   |

**HEAD #2**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F080          | 4M              |                    |           |            |             | C                   |

**HEAD #3**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F080          | 4M              |                    |           |            |             | C                   |

**HEAD #4**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F080          | 4M              |                    |           |            |             | C                   |

ORDERING

HEAD #3

HEAD #4



**F170-DUO (F170-2V)**

FILL IN YOUR PART #:

**F170-2V-POWER-CCT-CRI-BEAM ANGLE-FINISH-ACCESSORIES-C**

FINISHES

CRI

NOTES:

**HEAD #3**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F170          | 2V              |                    |           |            |             | C                   |

**HEAD #4**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F170          | 2V              |                    |           |            |             | C                   |

HEAD #1

HEAD #3



**F170-DUO (F170-2H)**

FILL IN YOUR PART #:

**F170-2H-POWER-CCT-CRI-BEAM ANGLE-FINISH-ACCESSORIES-C**

FINISHES

CRI

NOTES:


**HEAD #1**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F170          | 2H              |                    |           |            |             | C                   |

**HEAD #3**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F170          | 2H              |                    |           |            |             | C                   |

ORDERING

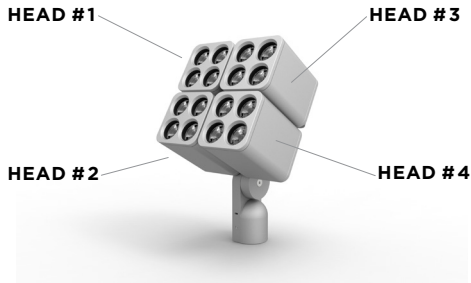

**F170-QUAD (F170-4F)**

FILL IN YOUR PART #:

**F170-4F-POWER-CCT-CRI-BEAM ANGLE-FINISH-ACCESSORIES-C**

FINISHES

CRI

NOTES:

---



---



---

**HEAD #1**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F170          | 4F              |                   |           |            |             | C                   |

**HEAD #2**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F170          | 4F              |                   |           |            |             | C                   |


**HEAD #3**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F170          | 4F              |                   |           |            |             | C                   |

**HEAD #4**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F170          | 4F              |                   |           |            |             | C                   |

ORDERING

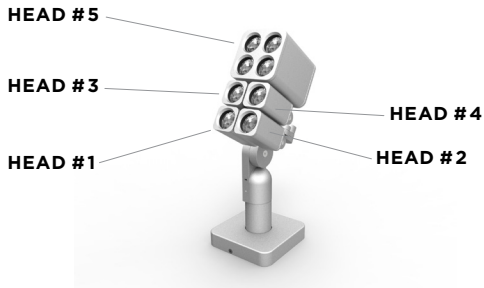

**F380-COMBO (F380-5T)**

FILL IN YOUR PART #:

**F380-5T-POWER-CCT-CRI-BEAM ANGLE-FINISH-ACCESSORIES-C**

| FINISHES | CRI | NOTES: |
|----------|-----|--------|
|          |     |        |
|          |     |        |

**HEAD #1**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F380          | 5T              |                   |           |            |             | C                   |

**HEAD #2**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F380          | 5T              |                   |           |            |             | C                   |

**HEAD #3**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F380          | 5T              |                   |           |            |             | C                   |


**HEAD #4**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F380          | 5T              |                   |           |            |             | C                   |

**HEAD #5**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|-------------------|-----------|------------|-------------|---------------------|
| F380          | 5T              |                   |           |            |             | C                   |

ORDERING

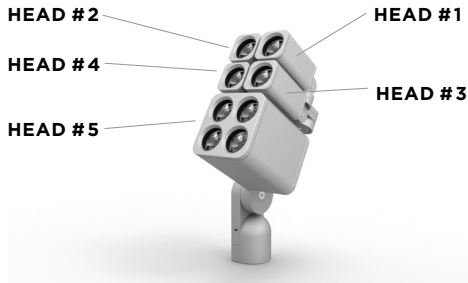

**F380-COMBO (F380-5B)**

FILL IN YOUR PART #:

**F380-5B-POWER-CCT-CRI-BEAM ANGLE-FINISH-ACCESSORIES-C**

FINISHES

CRI

NOTES:

---



---



---

**HEAD #1**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F380          | 5B              |                    |           |            |             | C                   |

**HEAD #2**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F380          | 5B              |                    |           |            |             | C                   |

**HEAD #3**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F380          | 5B              |                    |           |            |             | C                   |

**HEAD #4**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F380          | 5B              |                    |           |            |             | C                   |

**HEAD #5**

| FIXTURE MODEL | FIXTURE CONFIG. | POWER/LUMEN OUTPUT | CCT/COLOR | BEAM ANGLE | ACCESSORIES | WIRING AND MOUNTING |
|---------------|-----------------|--------------------|-----------|------------|-------------|---------------------|
| F380          | 5B              |                    |           |            |             | C                   |