

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

**FEATURES :**

- MODULAR OPTICS IN 15/20/25/35/45 DEGREES
- UP TO 10,000+ CBCP AT 3000K
- ADJUSTABLE FROM BELOW THE CEILING FOR EASY AIMING
- WORKS WITH BOTH 0-10V AND ELV DIMMING RIGHT OUT OF THE BOX
- FIELD REPLACEABLE LIGHT ENGINE INSTALLS QUICKLY AND EASILY WITHOUT TOOLS



## ERIA with Square Open Trim

JMA - ST



## ERIA HOUSING

JMA - SH

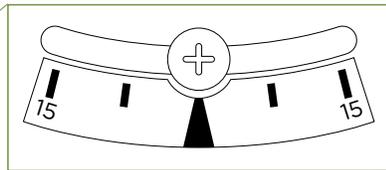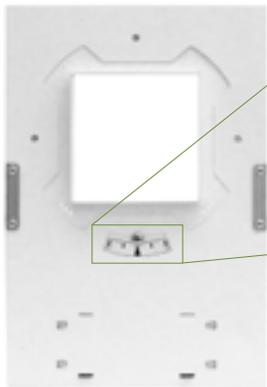

Housing allows square trim rotation angle correction 15° left or right

## COLOR OPTIONS

Available in Satin White or Satin Black finishes




DATE	PROJECT	FIRM	TYPE
------	---------	------	------

**ERIA** with Square Pinhole Trim  
JMA - ST/SP

20° (OPI-JMA-20) beam angle optic  
recommended pairing





**ERIA** with Square Open Trimless  
JMA - ST/TL

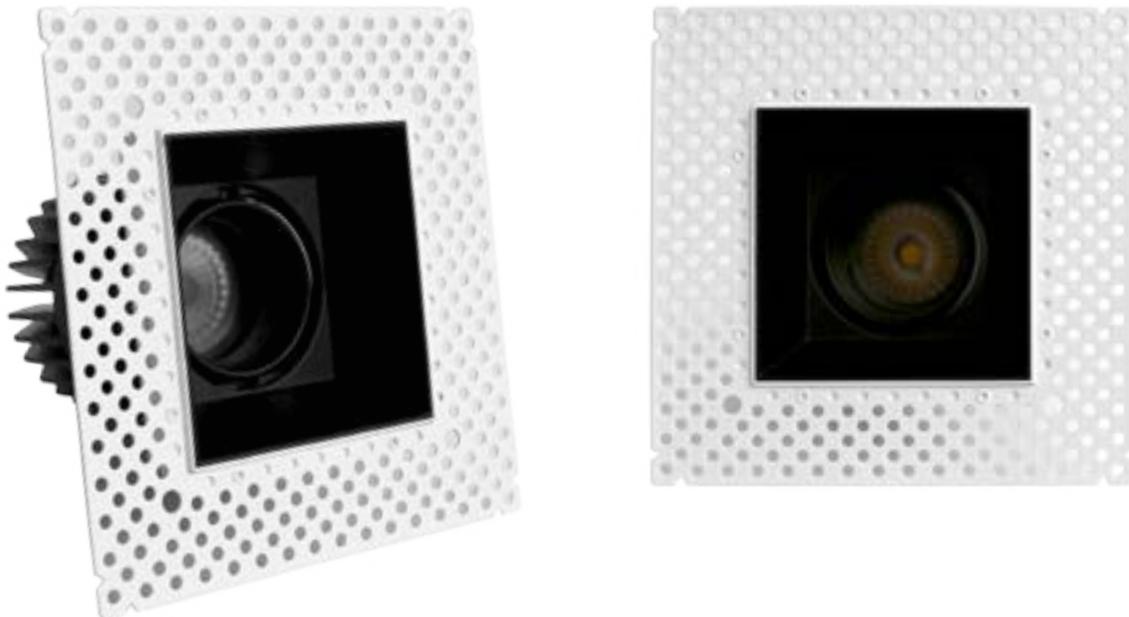


DATE	PROJECT	FIRM	TYPE																		
<b>BINNING</b>	<b>2-STEP COLOR CONSISTENCY</b>																				
<b>COLOR TEMPERATURE</b>	<b>2700K* / 3000K* / 3500K / 4000K</b>		*available in >90 CRI																		
<b>MODULAR OPTICS</b>	<b>INTERCHANGEABLE TOTAL INTERNAL REFLECTION (TIR) OPTIC FOR 15° / 20° / 25° / 35° / 45° BEAM ANGLE OPTIONS</b>																				
<b>OUTPUT AT 3000K/80CRI, OPEN TRIM</b>	<table border="1"> <thead> <tr> <th>BEAM ANGLE</th> <th>CBCP</th> <th>DELIVERED LUMENS</th> </tr> </thead> <tbody> <tr> <td>15</td> <td>10,473</td> <td>1237</td> </tr> <tr> <td>20</td> <td>5988</td> <td>1124</td> </tr> <tr> <td>25</td> <td>5423</td> <td>1119</td> </tr> <tr> <td>35</td> <td>2585</td> <td>960</td> </tr> <tr> <td>45</td> <td>1530</td> <td>868</td> </tr> </tbody> </table>			BEAM ANGLE	CBCP	DELIVERED LUMENS	15	10,473	1237	20	5988	1124	25	5423	1119	35	2585	960	45	1530	868
BEAM ANGLE	CBCP	DELIVERED LUMENS																			
15	10,473	1237																			
20	5988	1124																			
25	5423	1119																			
35	2585	960																			
45	1530	868																			
<b>ELECTRICAL</b>	<b>SYSTEM WATTS</b>	18.5W																			
	<b>INPUT VOLTAGE</b>	120V Standard. 277V option available																			
<b>DIMMING</b>	<b>WORKS WITH BOTH 0-10V AND ELV DIMMING OUT OF THE BOX</b>																				
<b>ADJUSTABLE</b>	<b>TRIM DESIGN MAKES FOR EASY AIMING OF LIGHT FROM BELOW THE CEILING, EVEN WHILE POWERED</b>																				
<b>ACCESSORIES</b>	<b>COMPATIBLE WITH STANDARD 50MM COLORED, LINEAR, OR PRISMATIC LENSES AND ACCESSORIES</b>																				
<b>TRIMS</b>	<b>FLANGE IS STANDARD. TRIMLESS OPTIONS AVAILABLE</b>																				
<b>RATED LIFE</b>	<b>50,000 HOURS AT 70% LUMEN MAINTENANCE</b>																				
<b>HOUSING</b>	<b>NEW CONSTRUCTION - NON IC</b>																				
<b>CEILING CUT OUT</b>	<b>3.875" x 3.875"</b>																				
<b>MAX CEILING THICKNESS</b>	<b>1"</b>																				
<b>EMERGENCY BATTERY BACKUP</b>	<b>7 WATT CONSTANT POWER BATTERY BACKUP WITH REMOTE TEST SWITCH</b>																				
<b>FIXTURE RATING &amp; CERTIFICATIONS</b>	<b>UL</b> <b>C-UL</b> <b>DRY/DAMP LOCATION RATED</b>																				
<b>WARRANTY</b>	<b>5 YEARS</b>																				


DATE	PROJECT	FIRM	TYPE
------	---------	------	------

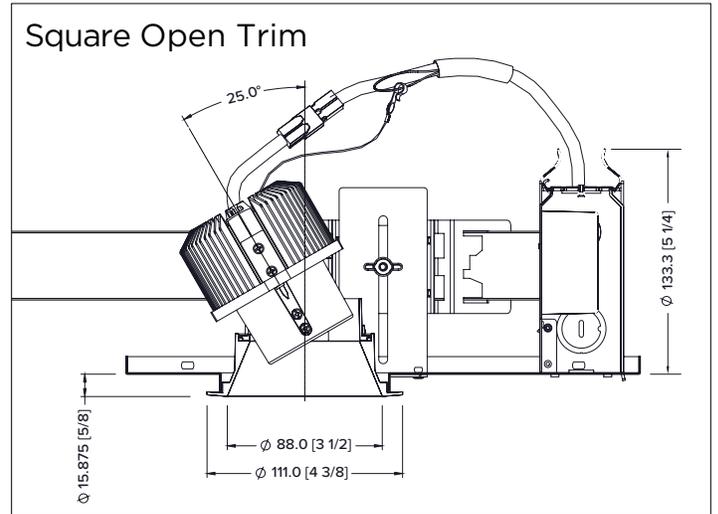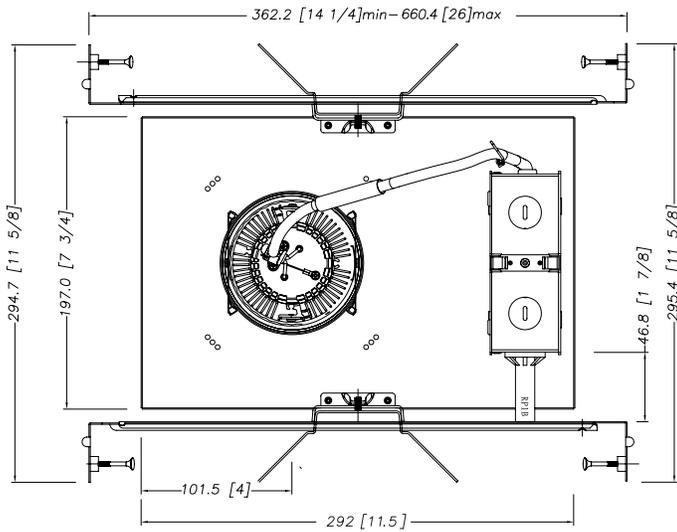

### EMERGENCY PACK DIMENSIONS

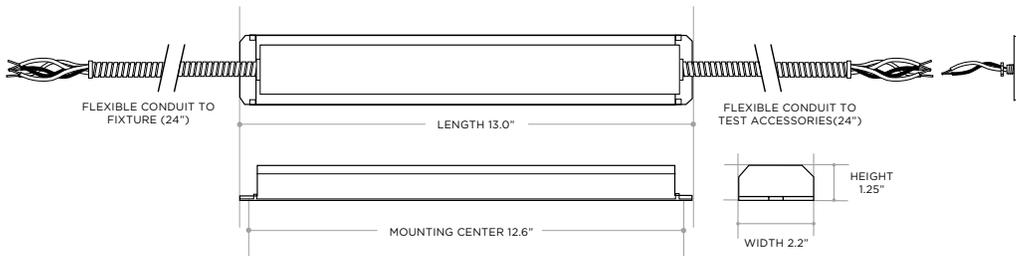

### EMERGENCY PACK TGRID MOUNTING ACCESSORY (OPTIONAL)

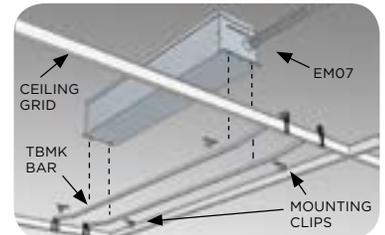

Use the TBMK mounting kit to remote mount flexed units within a grid ceiling. The EM07 is secured to the bars of the TBMK via mounting clips. The bars then mount to the T-bars of the ceiling grid. The flexible conduit of the EM07 connects to the fixture.

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

**ERIA ORDERING INFORMATION**

Specify the following four unique items

TRIM TYPE	
MODEL #	FINISH
JMA - ST - Square Open	WH - White BK - Black
JMA - ST/SP - Square Pinhole	
JMA - ST/TL - Square Open Trimless	

LED MODULE	
MODEL #	CCT/CRI
JMA - MOD -	27 - 2700K
	27/90 - 2700K/90CRI
	30 - 3000K
	30/90 - 3000K/90CRI
	35 - 3500K
	40 - 4000K

OPTIC BEAM ANGLE	
MODEL #	ANGLE
OPI - JMA -	15 - 15°
	20 - 20°
	25 - 25°
	35 - 35°
	45 - 45°

HOUSING	
MODEL #	VOLTAGE
JMA - SH - New Construction	120 - 120V
JMA - SH - EM07 - New Construction with Emergency Battery	277 - 277V

EXAMPLE ORDERING			
1 - TRIM TYPE:	<u>JMA</u> - <u>ST</u> - <u>WH</u>	2 - LED MODULE:	<u>JMA</u> - <u>MOD</u> - <u>30/90</u>
3 - OPTIC BEAM ANGLE:	<u>OPI</u> - <u>JMA</u> - <u>15</u>	4 - HOUSING:	<u>JMA</u> - <u>SH</u> - <u>120</u>

EMERGENCY BACKUP MOUNTING OPTION
MODEL #
ACC - JMA - TBMK TBar Grid Mounting Kit