

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

SLIM COVE INT IS AN ENERGY EFFICIENT, HIGH OUTPUT, LOW PROFILE, SIMPLE INSTALLATION FIXTURE DESIGNED WITH LINE VOLTAGE IN-LINE CONNECTIONS. THE SLIM COVE LINE VOLTAGE ALSO CAN BE USED FOR PORTABLE LISTING APPLICATIONS WITH THE USE OF AN OPTIONAL CORD AND PLUG POWER CABLE.

FEATURES :

- ECONOMICAL
- LOW PROFILE
- HIGH EFFICACY
- SIMPLE INSTALLATION
- INTEGRAL DRIVER / AC POWER
- PORTABLE INSTALLATION AVAILABLE

Being Discontinued Fall 2019
See Slim Cove Dim for
Comparable Options



<https://www.ecosenselighting.com/products/slim-cove/slim-cove-dim/>

MODEL	LENGTH	COLOR	VOLTAGE	LENS
SCIS	06 - 6" 12 - 12" 48 - 48"	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	120 - 100-120VAC	CL - Clear Lens

EXAMPLE: SCIS - 12 - 27 - 120 - CL

PERFORMANCE	CCT(K)	OPTIC	LUMEN OUTPUT / LF	EFFICACY (lm/W)
	2700K	120°x120°	302 lm	84lm/W
	3000K	120°x120°	308 lm	85lm/W
	3500K	120°x120°	328 lm	91lm/W
	4000K	120°x120°	348 lm	98lm/W

COLOR RENDERING INDEX	80+
COLOR CONSISTENCY	2 STEP MACADAM ELLIPSE
LUMEN DEPRECIATION / RATED LIFE	L70 > 50,000 HOURS @ 25°C**

**Calculations for LED fixtures are based on measurements that comply with IES LM-80 testing procedures and IES TM-21 Calculator.

ELECTRICAL	POWER CONSUMPTION	TYPICAL WATTAGE: 1.6W(6in) ; 3.5W(12in) ; 14W(48in) (THE TYPICAL INPUT POWER RANGE ALLOWS FOR A +/-10% VARIATION OF ALL COMPONENTS) MAXIMUM WATTAGE: 2W(6in) ; 4W(12in) ; 16W (48in) (ALL FIXTURES ARE LABELLED WITH MAXIMUM WATTAGE)
	POWER FACTOR	48in PF>0.35, 12in PF>0.35, 6in PF>0.25
	MAX FIXTURE RUN LENGTH	90ft (27m)
	OPERATING VOLTAGE	100-120VAC, 50/60Hz
	DRIVER	INTEGRAL TO FIXTURE
	STARTUP TEMPERATURE	-4°F TO 122°F (-20°C TO 50°C)
	OPERATING TEMPERATURE	-4°F TO 122°F (-20°C TO 50°C)
	STORAGE TEMPERATURE	-40°F TO 176°F (-40°C TO 80°C)
	CONTROL	NOT DIMABLE. ON-OFF CONTROL ONLY

EcoSense THD/Inrush Current/Power Factor Information: Please contact an EcoSense Lighting sales representative.
*Maximum run length is based on the measurements of 12" and 48" fixtures. Please contact an EcoSense Lighting representative for 6" fixture need.

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

PHYSICAL	DIMENSIONS (WITH MOUNTING CLIP)	W 1.37" x H 0.93" x L 6"/12"/48"; (34.7mm x 23.6mm x 152.4/304.8mm/1,219.2mm)
	(WITHOUT MOUNTING CLIP)	W 0.91" x H 0.91" x L 6"/12"/48"; (23mm x 23mm x 152.4/304.8mm/1,219.2mm)
	HOUSING / LENS	POLYCARBONATE
	WEIGHT	0.13lbs / 0.06kg (6in) ; 0.24lbs / 0.11kg (1ft) ; 0.92lbs / 0.415kg (4ft)
	CONNECTORS	INTEGRAL MALE / FEMALE 2 PIN CONNECTORS
	ENVIRONMENT	INDOOR; ETL CERTIFIED FOR DRY/DAMP LOCATIONS
	BEAM ANGLE	CLEAR LENS: 120° x 120°, FROSTED LENS ACCESSORY AVAILABLE
	MOUNTING OPTIONS:	INTEGRAL ADJUSTABLE

Being Discontinued Fall 2019
See Slim Cove Dim for Comparable Options

RATING & CERTIFICATIONS	ETL Certified to UL 1598 and UL 153 RoHS Compliant	 
LIMITED WARRANTY	5 Years	

https://www.ecosenselighting.com/products/slim-cove/slim-cove-dim/

OPTIONAL ACCESSORIES

Wiring Options

Power Cables - 120V

*Leader Cable, 10ft	INT2P-A-LDR-120-10
*Leader Cable, Cord + Plug, 10ft	INT2P-A-LDR-CP-120-10
Jumper Cable, 12in	INT2P-A-JMP-120-12
Jumper Cable, 3in	INT2P-A-JMP-120-03

* One (1) Terminator included standard with each leader cable.
One Leader Cable is required per circuit / fixture run. Leader / Jumper cables are not rated for plenum applications.

Mounting Options

Adjustable Mounting Clip (Included with fixtures. Only order if misplaced)	SCI-A-MNT-ADJ
Mounting Track, 48in	SCI-A-MNT-TRK-48

Louver Options

Louver, 6in	SCI-A-LVR-06
Louver, 12in	SCI-A-LVR-12

Accessory Options

In-Line Switch, Cord + Plug	SCI-A-ILS-CP-120
Switched Junction Box	SCI-A-SJB-120

One (1) Terminator included standard with each In-Line Switch and Switched Junction Box.


Snap on Frosted Lens Options

Frosted Lens, 6in	SCI-A-FRLS-06
Frosted Lens, 12in	SCI-A-FRLS-12
Frosted Lens, 48in	SCI-A-FRLS-48

DATE	PROJECT	FIRM	TYPE
------	---------	------	------

DIMENSIONS - ADJUSTABLE MOUNTING CLIP - DIRECT MOUNT


Being Discontinued Fall 2019
See Slim Cove Dim for
Comparable Options

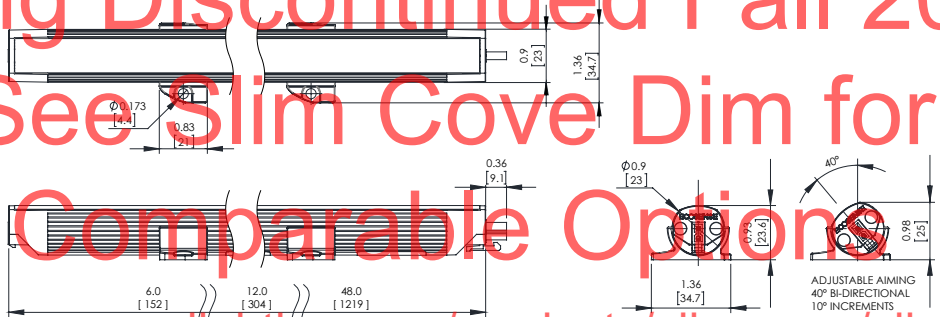

<https://www.ecosenselighting.com/products/slim-cove/slim-cove-dim/>

DIMENSION IN
INCHES / [MM]

DIMENSIONS - ADJUSTABLE MOUNTING CLIP - DIRECT MOUNT WITH MOUNTING TRACK

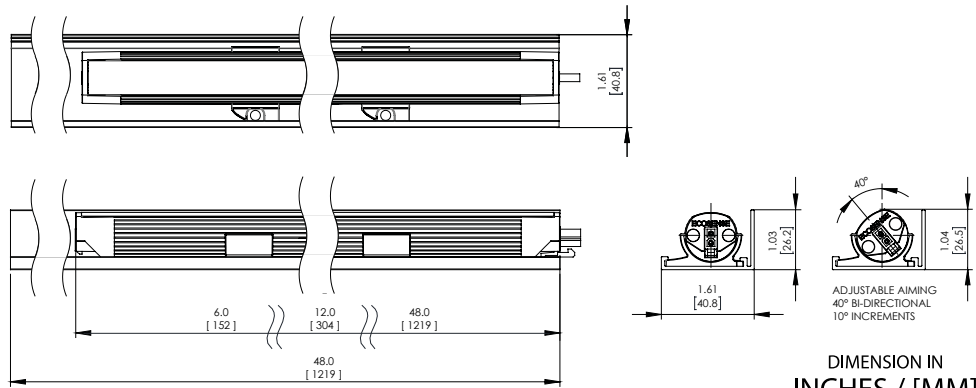

DIMENSION IN
INCHES / [MM]

DISTRIBUTIONS
SCIS-XX-XX-120-CL
120° X 120°

