


Proton 1 LED

CABLE SUSPENDED (CS)

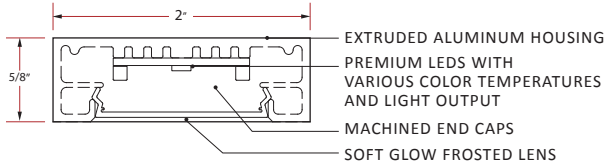

FEATURES:

- Powered Suspension System - No power cord
- High transmission frosted lenses with no diode imaging
- No visible fasteners
- Extruded aluminum housing
- Dimmable/Programmable drivers for controllable light output
- High efficacy LEDs with 5 year warranty
- Under 2 steps MacAdams Ellipse Binning

NOTES:

- **REQUIRES REMOTE DRIVER(S)** (see page 5 for more info)



PRODUCT SPECIFICATION

NOTE: All options *italicized in gray* may increase lead times and/or incur higher costs - please consult factory with questions.

FIXTURE TYPE	MOUNTING/ ORIENTATION	NOMINAL LENGTH*	COLOR TEMP	LED DRIVE POWER	VOLTAGE	DRIVER	HOUSING FINISH
Pn1							
Pn1 Proton 1	CSD Cable Suspended - DIRECT CSI Cable Suspended - INDIRECT	1' 1' 1-3/8"*** 2' 2' 1-3/8" 3' 3' 1-3/8"*** 4' 4' 1-3/8" CR Continuous Run (Specify length in nominal feet)	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	VLO Very Low Output 375 lumens/ft. (4w/ft.) LO Low Output 570 lumens/ft. (6w/ft.) SO Standard Output 740 lumens/ft. (8w/ft.) HO High Output 935 lumens/ft. (10w/ft.) VHO Very High Output 1,090 lumens/ft. (12w/ft.) CPO Custom Power Output Consult factory	UNV Universal (120-277v) 1V 120v 2V 277v 3V 347v*	ND Non-Dimming — 0-10v DIMMING — 10D 10% DIM 1D 1% DIM — LUTRON — LTEA Lutron Hi-Lume 1% (2-Wire) LDE1 Lutron EcoSystem 1% "Soft on" (Digital) LDES Lutron EcoSystem 5% 5-Series (Digital) — DALI — DALI Digital Addressable Lighting Interface	SC Satin Clear Anodize (Standard) SW Satin White (Powder Coat) MB Matte Black (Powder Coat) CF Custom Finish* (Consult factory)
		*Dimensions are for reference only. Contact factory for more specific information or shop drawings. **Odd lengths may incur slightly higher per foot pricing.				*Not all dimming options are available with 347v.	
						*RAL and color match are available.	

HARDWARE* DETAIL FINISH	DRIVER HOUSING FINISH	CANOPY SIZE OPTIONS*	CANOPY FINISH	POWER CORD COLOR	AIRCRAFT CABLE LENGTH*	OPTIONS/ CUSTOMIZATION*
MF Machined Finish (Standard) CF Custom Finish (Consult factory)	MA Mill Aluminum* SC Satin Clear SW Satin White SB Satin Black CF Custom Finish (Consult factory)	5 SERIES CANOPY 55 5" Power feed canopy 5" Non-power feed canopy 52 5" Power feed canopy 2" Non-power feed canopy 50 5" Power feed canopy Canopy only at power feed 4 SERIES CANOPY 44 4" Power feed canopy 4" Non-power feed canopy 41 4" Power feed canopy 1" Non-power feed canopy 40 4" Power feed canopy Canopy only at power feed *CONTINUOUS RUNS REQUIRE THE 55" OR THE 44" OPTION. CONSULT FACTORY WITH QUESTIONS. *See options section and installation instructions for more information.	SW Satin White (Standard) CPC Custom Powder Coat canopy finish* MF Machine Finish (Standard) SW Satin White CF Custom Finish*	PSS Powered Suspension System (No power cord) CC Custom Cord*	2 2' 4 4' 6 6' 8 8' CL Custom Length Specify in feet (IE: CL10 for 10') Consult factory to confirm spec	XX No EMB or Customization EMB7 7 Watt battery back-up** (Approximately 600 lumens) EMB12 12 Watt battery back-up** (Approximately 1,000 lumens) 90 90+ CRI LED BOARDS (IE: CL10 for 10') Consult factory to confirm spec CCP Corners/patterns* CD Custom Driver* CR Customization Requested*
NOTE: The MF option is strongly recommended. Other options will result in higher costs and potentially longer lead times. **Hardware* refers to the end caps and knuckles (knuckles only for the "Rotational" option).		*Most cost effective.		*Consult factory.		*Consult factory for all custom options or custom concept requests. NOTE: Customization may incur higher costs and/or increased lead times. **The EMB12 is slightly more expensive than the EMB7 option (BOTH OPTIONS ARE REMOTE ONLY).

SPECIFICATION INFORMATION

GENERAL NOTES:

All fixtures are **UL listed** for **dry** and **damp** locations.

REMOTE DRIVER for all options.

Please contact the factory with any specification questions.

Italicized grayed out options may incur additional costs and/or extended lead times. Please consult the factory.

FIXTURE ORIENTATION:

Direct (CSD) for downlight applications.

Indirect (CSI) for uplight applications.

DRIVER: [REMOTE]

1) NON-DIMMING: As described... this fixture will not dim.

2) DIMMING: 0-10v: 1%, 10% :: Lutron: 2-wire Forward phase (Hi-Lume 1%), Ecosystem to 1% (Soft On), Ecosystem to 5% (5 Series).

"DALI" - Specify driver. See "Dimming Options" on subsequent pages for more information. For other dimming options, consult the factory.

3) EMERGENCY: Specify EMB under the Options/Customization category at the end of the cut sheet along with the desired lumen output (600 or 1,000 lumens - the latter is slightly more costly).

4) Drivers are programmed according to our standard lumen packages or to custom watt/lumen package requirements.

5) Consult factory with any questions or specification requirements.

FINISHES:

The standard finish is a Satin Clear anodized housing with Machine Finished hardware. Machined finish is preferable for machined components (Hardware Detail) - Powder coating these parts may result in additional costs. Consult the factory with any questions about standard or custom finishing options.


CUSTOMIZATION:

We have numerous custom options available. However, if there is something unique required for a project, from simple options to complete custom requests, we are more than willing to entertain any creative notions you might have. Just ask.



Proton₁ LED

SURFACE MOUNTED (SM)

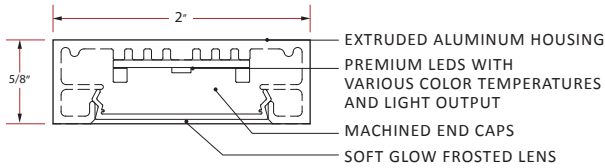


FEATURES:

- Ceiling mounting system
- High transmission frosted lenses with no diode imaging
- No visible fasteners
- Extruded aluminum housing
- Dimmable/Programmable drivers for controllable light output
- High efficacy LEDs with 5 year warranty
- Under 2 steps MacAdams Ellipse Binning
- 5/16" thick machined end caps
- Slightly recessed beveled lens housing

NOTES:

- **REQUIRES REMOTE DRIVER(S)** (see page 5 for more info)

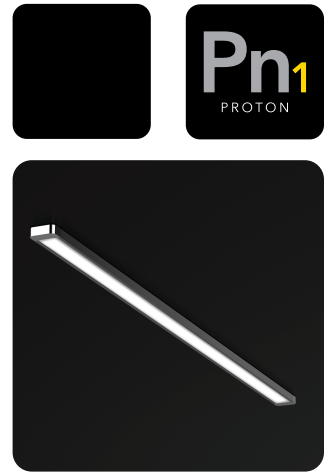


PRODUCT SPECIFICATION

NOTE: All options *italicized in gray* may increase lead times and/or incur higher costs - please consult factory with questions.

FIXTURE TYPE	MOUNTING	NOMINAL LENGTH*	COLOR TEMP	LED DRIVE POWER	VOLTAGE	DRIVER	HOUSING FINISH	HARDWARE* DETAIL FINISH
Pn1	SMT							
Pn1 Proton 1	SMT Surface Mount - TOP	1' 1'-1-3/8"*** 2' 2'-1-3/8" 3' 3'-1-3/8"*** 4' 4'-1-3/8" CR Continuous Run (Specify length in nominal feet)	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	VLO Very Low Output 375 lumens/ft. (4w/ft.) LO Low Output 570 lumens/ft. (6w/ft.) SO Standard Output 740 lumens/ft. (8w/ft.) HO High Output 935 lumens/ft. (10w/ft.) VHO Very High Output 1,090 lumens/ft. (12w/ft.) CPO Custom Power Output <i>Consult factory</i>	UNV Universal (120-277v) 1V 120v 2V 277v 3V 347v*	ND Non-Dimming — 0-10v DIMMING — 10D 10% DIM 1D 1% DIM — LUTRON — LTEA Lutron Hi-Lume 1% (2-Wire) LDE1 Lutron EcoSystem 1% "Soft on" (Digital) LDES Lutron EcoSystem 5% 5-Series (Digital) — DALI — DALI Digital Addressable Lighting Interface	SC Satin Clear Anodize (Standard) SW Satin White (Powder Coat) MB Matte Black (Powder Coat) CF Custom Finish* (Consult factory)	MF Machined Finish (Standard) CF Custom Finish (Consult factory)
		*Dimensions are for reference only. Contact factory for more specific information or shop drawings. **Odd lengths may incur slightly higher per foot pricing.				*Not all dimming options are available with 347v.		NOTE: The MF option is strongly recommended. Other options will result in higher costs and potentially longer lead times. ***"Hardware" refers to the end caps and knuckles (knuckles only for the "Rotational" option).

DRIVER HOUSING FINISH	OPTIONS/CUSTOMIZATION*
MA Mill Aluminum* SC Satin Clear SW Satin White SB Satin Black CF Custom Finish (Consult factory)	XX No EMB or Customization EMB7 7 Watt battery back-up** (Approximately 600 lumens) EMB12 12 Watt battery back-up** (Approximately 1,000 lumens) 90 90+ CRI LED BOARDS (2700K - 4000K only) CCP Corners/patterns* CD Custom Driver* CR Customization Requested*
*Consult factory for all custom options or custom concept requests. NOTE: Customization may incur higher costs and/or increased lead times. **The EMB12 is slightly more expensive than the EMB7 option (BOTH OPTIONS ARE REMOTE ONLY).	

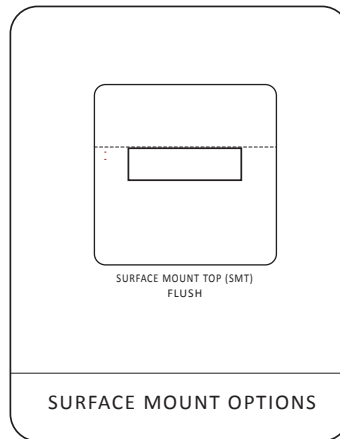

SPECIFICATION INFORMATION

GENERAL NOTES:

All fixtures are **UL listed** for **dry** and **damp** locations.

REMOTE DRIVER for all options.

Please contact the factory with any specification questions.

Italicized grayed out options may incur additional costs and/or extended lead times. Please consult the factory.

DRIVER: [REMOTE]

- 1) NON-DIMMING: As described... this fixture will not dim.
- 2) DIMMING: 0-10v: 1%, 10% :: Lutron: 2-wire Forward phase (Hi-Lume 1%), Ecosystem to 1% (Soft On), Ecosystem to 5% (5 Series). "DALI" - Specify driver. See "Dimming Options" on subsequent pages for more information. For other dimming options, consult the factory.
- 3) EMERGENCY: Specify EMB under the Options/Customization category at the end of the cut sheet along with the desired lumen output (600 or 1,000 lumens - the latter is slightly more costly).
- 4) Drivers are programmed according to our standard lumen packages or to custom watt/lumen package requirements.
- 5) Consult factory with any questions or specification requirements.

FINISHES:

The standard finish is a Satin Clear anodized housing with Machine Finished hardware. Machined finish is preferable for machined components (Hardware Detail) - Powder coating these parts may result in additional costs. Consult the factory with any questions about standard or custom finishing options.


CUSTOMIZATION:

We have numerous custom options available. However, if there is something unique required for a project, from simple options to complete custom requests, we are more than willing to entertain any creative notions you might have. Just ask.



Proton₁ LED

ASYMMETRICAL MOUNTING SYSTEM (ASM)

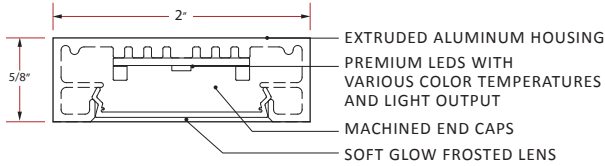


FEATURES:

- Unique, single point, asymmetric mounting system
- High transmission frosted lenses with no diode imaging
- No visible fasteners
- Extruded aluminum housing
- Dimmable/Programmable drivers for controllable light output
- High efficacy LEDs with 5 year warranty
- Under 2 steps MacAdams Ellipse Binning
- 5/16" thick machined end caps
- 360° rotation option- with cable or tube suspension
- Slightly recessed beveled lens housing

NOTES:

- **REQUIRES REMOTE DRIVER(S)** (see page 5 for more info)

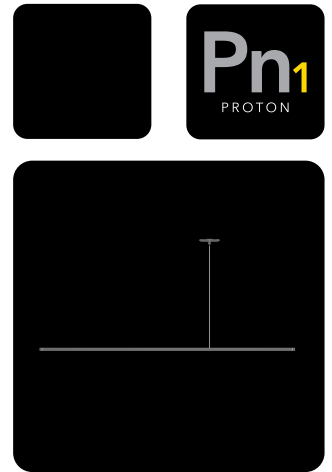

PRODUCT SPECIFICATION

NOTE: All options *italicized in gray* may increase lead times and/or incur higher costs - please consult factory with questions.

FIXTURE TYPE	MOUNTING/ ORIENTATION	FIXTURE ORIENTATION	FIXTURE SIZE*	COLOR TEMP	LED DRIVE POWER	VOLTAGE	DRIVER	HOUSING FINISH
Pn1								
Pn1 Proton 1	ASM-C Asymmetrical Suspension Mount - CABLE ASM-T Asymmetrical Suspension Mount - TUBE	D Direct I Indirect	2' 24" Lit - 12" Non-Lit 3' 36" Lit - 18" Non-Lit 4' 48" Lit - 24" Non-Lit	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	VLO Very Low Output 375 lumens/ft. (4w/ft.) LO Low Output 570 lumens/ft. (6w/ft.) SO Standard Output 740 lumens/ft. (8w/ft.) HO High Output 935 lumens/ft. (10w/ft.) VHO Very High Output 1,090 lumens/ft. (12w/ft.) CPO Custom Power Output Consult factory	UNV Universal (120-277v) 1V 120v 2V 277v 3V 347v*	ND Non-Dimming — 0-10v DIMMING — 10D 10% DIM 1D 1% DIM — LUTRON — LTE Lutron Hi-Lume A-Series (2-Wire) LDE1 Lutron EcoSystem H-Series (1% 0-10v) LDES Lutron EcoSystem 5-Series (5% 0-10v) — DALI — DALI Digital Addressable Lighting Interface	SC Satin Clear Anodize (Standard) SW Satin White (Powder Coat) MB Matte Black (Powder Coat) CF Custom Finish* (Consult factory)
			*Actual non-lit lengths are nominal.			*Not all dimming options are available with 347v.		
							*RAL and color match are available.	

HARDWARE* DETAIL FINISH	DRIVER HOUSING FINISH	CANOPY SIZE OPTIONS*	CANOPY FINISH	POWER CORD COLOR	FIXTURE DROP LENGTH*	OPTIONS/ CUSTOMIZATION*
MF Machined Finish (Standard) CF Custom Finish (Consult factory)	MA Mill Aluminum* SC Satin Clear SW Satin White SB Satin Black CF Custom Finish (Consult factory)	— 5 SERIES CANOPY — 5 5" Power feed canopy	SW Satin White (Standard) CPC Custom Powder Coat canopy finish*	PSS Powered Suspension System (No power cord) NA Not Applicable (Use with Asymmetric-T Specification) CC Custom Cord*	1' 12" 2' 24" 3' 36" 4' 48" CU Custom - Specify in inches (IE: CU4.5)	XX No EMB or Customization EMB7 7 Watt battery back-up** (Approximately 600 lumens) EMB12 12 Watt battery back-up** (Approximately 1,000 lumens) 90 90+ CRI LED BOARDS (2700K - 4000K only) CCP Corners/patterns* CD Custom Driver* CR Customization Requested*
		— 4 SERIES CANOPY — 4 4" Power feed canopy	MF Machine Finish (Standard) SW Satin White CF Custom Finish*			*Consult factory for all custom options or custom concept requests. NOTE: Customization may incur higher costs and/or increased lead times. **The EMB12 is slightly more expensive than the EMB7 option (BOTH OPTIONS ARE REMOTE ONLY).
NOTE: The MF option is strongly recommended. Other options will result in higher costs and potentially longer lead times. **Hardware* refers to the end caps and knuckles (knuckles only for the "Rotational" option).		*See options section and installation instructions for more information.	*Just about any finish is possible. For the 4" machined canopies, MF is strongly recommended. Contact the factory with questions or requests.	*Cables are field adjustable. NOTE: Rigid tubes must be ordered to a specific length - Specify in inches.		
*Most cost effective.				*Consult factory.		

SPECIFICATION INFORMATION

GENERAL NOTES:

All fixtures are **UL listed** for **dry** and **damp** locations.

REMOTE DRIVER for all options.

Please contact the factory with any specification questions.

Italicized grayed out options may incur additional costs and/or extended lead times. Please consult the factory.

FIXTURE ORIENTATION:

Direct (D) for downlight applications.

Indirect (I) for uplight applications.

DRIVER: [REMOTE]

1) NON-DIMMING: As described... this fixture will not dim.

2) DIMMING: 0-10v: 1%, 10% :: Lutron: 2-wire Forward phase (Hi-Lume 1%), Ecosystem to 1% (Soft On), Ecosystem to 5% (5 Series).

"DALI"- Specify driver. See "Dimming Options" on subsequent pages for more information. For other dimming options, consult the factory.

3) EMERGENCY: Specify EMB under the Options/Customization category at the end of the cut sheet along with the desired lumen output (600 or 1,000 lumens - the latter is slightly more costly).

4) Drivers are programmed according to our standard lumen packages or to custom watt/lumen package requirements.

5) Consult factory with any questions or specification requirements.

FINISHES:

The standard finish is a Satin Clear anodized housing with Machine Finished hardware. Machined finish is preferable for machined components (Hardware Detail) - Powder coating these parts may result in additional costs. Consult the factory with any questions about standard or custom finishing options.

CUSTOMIZATION:

We have numerous custom options available. However, if there is something unique required for a project, from simple options to complete custom requests, we are more than willing to entertain any creative notions you might have. Just ask.



Proton₁ LED

PHOTOMETRIC DATA

LED COMPONENT INFORMATION

- Fixture delivered light potential: 95 Lumens/Watt*
- Uniform light distribution
- 90+ CRI LED diode options
- Exceptional binning- less than 2 step MacAdams Ellipse
- Minimum 70% initial lumen output at 70,000 hours
- Standard 0-10v dimming to %10
- Lutron, Eldoled, Dali, and other dimming options
- 5 year system warranty

*Actual fixture efficacy will depend on specification. Higher lumens per watt are achieved with lower drive powers. Contact the factory with questions or for more information.

LUMEN OUTPUT *


LUMEN OUTPUT (PER FOOT)		
DRIVER OUTPUT	WATTAGE	LUMENS
VERY LOW (VLO)	4	375
LOW (LO)	6	570
STANDARD (SO)	8	745
HIGH (HO)	10	935
VERY HIGH (VHO)	12	1,090

PER 4' FIXTURE (TOTAL DELIVERED LUMENS)		
DRIVER OUTPUT	WATTAGE	LUMENS
VERY LOW (VLO)	16	1,500
LOW (LO)	24	2,280
STANDARD (SO)	32	2,980
HIGH (HO)	40	3,740
VERY HIGH (VHO)	48	4,360

- **VERY LOW:** Considerably underdrives the LEDs to maximize fixture efficacy potential and limit wattage use.
- **LOW:** Underdrives the LEDs for reasonable light output while maintaining low wattage use.
- **STANDARD:** Drives the LEDs for the best combination of lumen output and fixture efficacy.
- **HIGH:** Drive the LEDs at higher capacity for higher lumen output with good efficacy.
- **VERY HIGH:** Drives the LEDs at the highest capacity for the highest lumen output with the best efficacy.

*Lumen output varies depending on ambient temperature. Cooler ambient and LED color temperatures result in higher luminaire performance. Calculations are based on 3500K LEDs.

LUMINOUS INTENSITY DISTRIBUTION

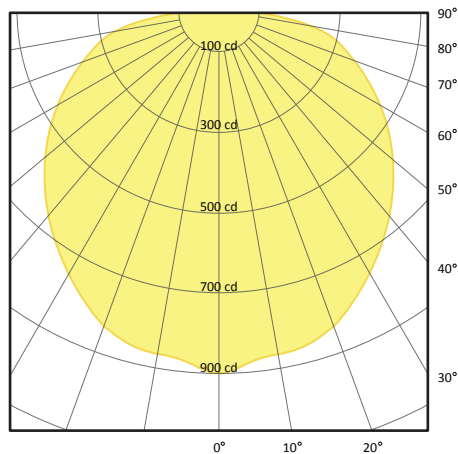


FIXTURE PROPERTIES (AS TESTED)

- 4' nominal length fixture
- Standard Output (SO)
- Total system energy consumption: 32 Watt
- 95 Lumens/Watt
- 4000K 80 CRI LED

ZONAL LUMEN SUMMARY

ZONE	LUMEN	%LAMP	%FIXTURE
0 - 30	693	16%	23.2%
0 - 40	1,139	26.4%	38.1%
0 - 60	2,090	48.4%	69.9%
0 - 90	2,989	69.2%	100%






REMOTE DRIVER HOUSING INFORMATION



REMOTE DRIVER HOUSING SIZES


The driver housing length is typically dictated by the options selected. Standard driver housing lengths are as shown. Non standard driver requests may increase or decrease the driver housing length. Specifications are subject to change without notice. Consult factory with questions, requests, or size limitations and we will do our best to accommodate your needs.




INSTRUCTIONS

See below for lid removal and installation instructions.

To remove the driver housing lid, use a broad slot screwdriver in the channel as shown here and twist the screwdriver ninety degrees. This may need to be done at both ends of the housing or multiple locations depending on the driver housing length.

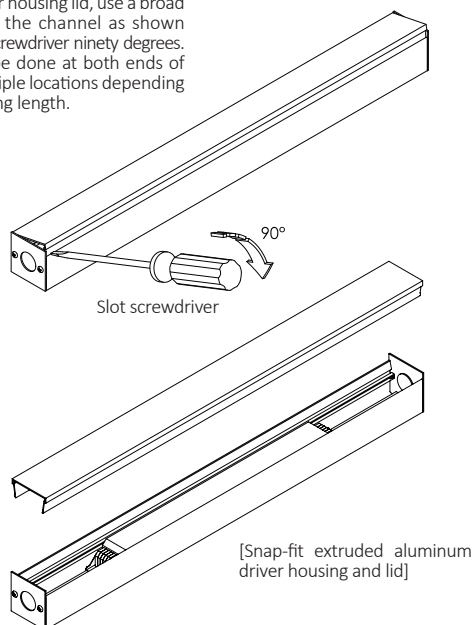

1) Drill mounting holes in the driver housing as needed to secure to a suitable surface. (If needed, a power feed hole can be drilled into the bottom of the housing for certain mounting/power feed applications).

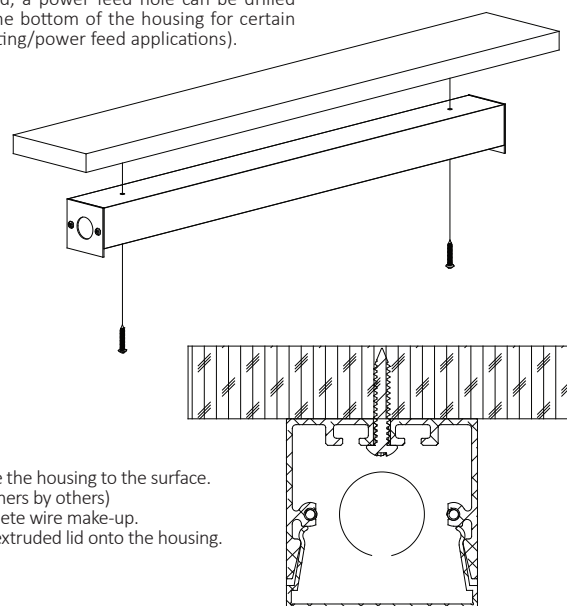

FINISHES

Mill Aluminum (MA) is the standard finish. Satin White and Satin Black powder coat and Satin Clear anodized finishes can be done for a small charge. Custom finishes are possible. Contact the factory for specific finish options, specific requests, RAL colors, or any other questions.



Mill Aluminum (MA)
[Standard finish]



Satin White (SW)
[Upgrade finish]



Satin Black (SB)
[Upgrade finish]



Satin Clear (SC)
[Upgrade finish]



Custom Finish (CF)
[Custom finish]



NOTES

Other options are possible. Please contact the factory with custom requests.

Lumium Lighting, LLC | 3590 Cadillac Ave, Suite A, Costa Mesa, CA 92626 | Phone: 760.757.2530 | Fax: 760.283.2333 | www.lumiumlighting.com

While we always strive to ensure all website content and product information is current, Lumium Lighting reserves the right to change specifications without notice.
© 2017 Lumium Lighting, LLC - All rights reserved.

0617



Lumium
lighting at its element

OPTIONS GUIDE

MOUNTING




CABLE SUSPENDED (CS)

Power Suspension System. Proton 1 (Pr1) can be static down-light: Direct (CSD) or static up-light: Indirect (CSI). Standard and custom power cord finishes, sleeve options, and canopy colors offer options to match almost any space. Stainless steel cables come in various lengths (4' is standard) and are field adjustable.



SURFACE MOUNT (SM)

Side Mount Top (SMT). The fixture is mounted on to the ceiling and will give a static down-light. Optional stand-offs allows for fixtures to be mounted from 1/2" to 12" as well as custom lengths if needed.



ASYMMETRIC MOUNT (ASM)


A unique configuration where the fixture is balanced from an off-center mounting point creating a dynamic aesthetic. This mounting option also allows some integral ballast options on the "1" series fixtures with standard T5 lamps. Direct, indirect, or rotational options round out this creative mounting option.




OPTIONS GUIDE

CONTINUOUS RUN

Proton 1 has the ability to have a continuous run option. The Component Seam continuous run lends to a more dramatic visual statement.



CONTINUOUS RUN
COMPONENT SEAM

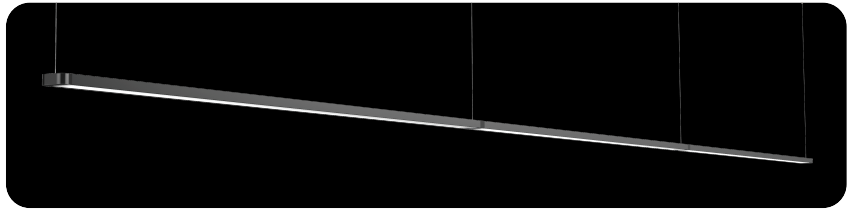

PROTON 1 (PN1) WITH A COMPONENT SEAM CONTINUOUS RUN

CANOPIES

STANDARD

Canopies have several standard options to suit various environment aesthetics. The standard cable suspension system has 5" Satin White canopies. However, other standard options include a 2" non-power feed canopy option as well as no canopy at all. Both of these include a 5" diameter power feed canopy.



55
5" diameter power feed and 5" diameter non-pow feed canopy. Most common canopy layout. Creates a consistent ceiling aesthetic.



52
5" diameter power feed and 2" diameter non-power feed canopy. Offers a more minimal ceiling treatment while maintaining the ability to cover up mistakes. Requires a 1/4-20 stud securely fastened to the ceiling.



50
5" diameter power feed canopy and no canopy on the non-power feed side. Minimal aesthetic. Requires a 1/4-20 stud securely attached to ceiling. Works well with continuous runs where the power can be carried inside the fixture.

MACHINED

Machined canopies are 4" in diameter and can be anodized as well as powder coated to match a desired color or they can be left with a mill finish for a more striking look. Similar non-power feed options are available with this aesthetic as well. These options do carry a higher cost than standard canopies, but also have an impressive appearance.



44
4" diameter machined power feed and 4" diameter machined non-power feed canopy. Offers a consistent ceiling aesthetic with smaller machined canopies. Mill, anodized, and powder coat finishes available.



41
4" diameter machined power feed and 1-1/4" diameter machined non-power feed canopy. Offers minimal ceiling treatment while maintaining the ability to cover mistakes. Requires a 1/4-20 stud securely fastened to the ceiling. Mill, anodized, and powder coat finishes available.




40
4" diameter machined power feed canopy and no canopy on the non-power feed side. Minimal aesthetic. Requires a 1/4-20 stud securely attached to the ceiling. Works well with continuous runs where the power can be carried inside the fixture. Mill, anodized, and powder coat finishes available.

CUSTOM

Custom canopies options are available and can look spectacular in certain applications. Contact the factory with all custom requests or with any questions.



CUSTOM POWDER COAT



CUSTOM ANODIZE



CUSTOM SHAPE




OPTIONS GUIDE


COLOR AND FINISH

Standard finish configurations are Satin Clear (SC) housing with Machined Finish (MF) machined components (end caps, knuckles, cover plates, etc.). The incredibly clean detail within all of the machined components lends to an incredibly high end aesthetic with two tone finish. Numerous custom anodizing and powder coated finishes are available as well. If you have a particular color/finish treatment in mind, please contact the factory and we will do our best to accommodate your project needs.

STANDARD



SATIN CLEAR
ANODIZING



MACHINED
COMPONENTS

CUSTOM



MATTE BLACK



GLOSS BLACK



BRONZE



MILL ALUMINUM



SPECULAR



SATIN WHITE



GLOSS WHITE



COLOR POWDER COAT



COLOR ANODIZE



RAL COLORS

FINISHED CONFIGURATION



THALLIUM 2 (Th2)

Cable Suspended Rotational mount system with two-tone finish, Satin Clear housing and Machined Finish components.

COVER PLATES


Cover plates are standard for Rotational Arm Mounting (RAM) Systems. Standard options are Flat (FT), Curved (CV), or Trim Ring (TR). With certain applications, cover plates or trim rings may not be necessary. Contact factory with questions or for more information. Custom cover plates are also available. If a certain aesthetic is desired, please contact the factory to review any concepts and we will do our best to bring your vision to life.

STANDARD



FLAT (CPFT)


Flat has a 4" diameter cover plate for use with a 3-O mud ring.




TRIM RING (TR)

1-1/4" diameter trim ring Can be used in applications such as desk mounting.

CUSTOM



SQUARE



TALL RECTANGLE



CUSTOM

CUSTOM

