EC@SENSE[®]

OVERVIEW • SPECIFICATIONS • ORDERING

SLIM COVE DIM

ACCESSORIES | CABLES

ATE	PROJECT	FIRM	ТҮРЕ
O 277 VAC. O	M CABLES HAVE MULTI-VOLT SUPPORT - 120 NE LEADER CABLE IS NEEDED PER CIRCUIT/		
FIXTURE RUN. CORNERS ANE	JUMPER CABLES ARE NEEDED FOR D CURVES.		
FEATURES :			
	DIEC RATED CABLE COMES WITH TERMINATOR CAP BLES COME IN 5', 1', AND 3" LENGTHS	H	
• TWO COND • NOT PLENU			

PHYSICAL

DIMENSIONS MATERIALS
 NOMINAL OD 0.300", LENGTH 3"/1'/5'/10'; (OD 7.62mm, L 0.304m/1.524m/3.048m)

 CABLE
 15 AWG, WHITE PVC JACKET, 2 CONDUCTOR, 300vH05VV-F/SJT, UL62, VDE-HAR-UL-CSA


 CONNECTOR
 PVC WHITE, UL94, S-60

ONE LEADER CABLE IS REQUIRED PER FIXTURE RUN. THE FOLLOWING TABLE SHOWS THE MAXIMUM NUMBER OF FIXTURES PER RUN


MAX FIXTURE RUN LENGTH

	M = 4W/ft		H = 8W/ft	
Volts	Max Run (feet)	Max Run (meters)	Max Run (feet)	Max Run (meters)
120	90	27.4	65	19.8
220	170	51.8	125	38.1
277	200	60.9	150	45.7

SCD 10 FOOT LEADER CABLE AND TERMINATOR CAP

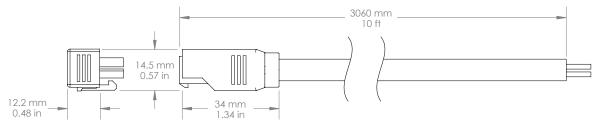

SCD JUMPER CABLES - 5', 1', AND 3"

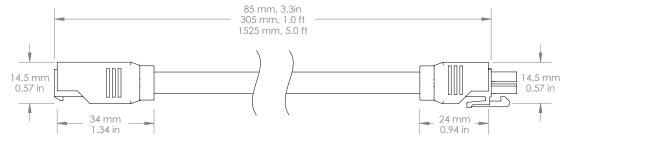

ORDERING

PART NUMBER

DESCRIPTION

CBL-2P-LWH-LDR-UNV-10CABLE ASSEMBLY, 2-PIN, WHITE, LEADER, UNIVERSAL VOLTAGE, W/TERMINATOR CAP, 10 FEETCBL-2P-LWH-JMP-UNV-5CABLE ASSEMBLY, 2-PIN, WHITE, JUMPER, UNIVERSAL VOLTAGE, 5 FEETCBL-2P-LWH-JMP-UNV-1CABLE ASSEMBLY, 2-PIN, WHITE, JUMPER, UNIVERSAL VOLTAGE, 1 FOOTCBL-2P-LWH-JMP-UNV-03CABLE ASSEMBLY, 2-PIN, WHITE, JUMPER, UNIVERSAL VOLTAGE, 3 INCH

LIMITED WARRANTY 5 YEARS

ECOSENSE LIGHTING INC. 837 NORTH SPRING STREET SUITE 103 LOS ANGELES, CA 90012

P • 310.496.6255
 F • 310.496.6256
 T • 855.632.6736
 855.6.ECOSEN

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. VISIT FCOSPENEIGHTING CON FORT THE MOST CURRENT SPECIFICATIONS. FOR A LIST OF PATENTS VISIT ECOSENSELIGHTING.COM/IP-PORTFOLIO/ #2017 ECOSENSE LIGHTING INC. ALL RIGHTS RESERVED. ECOSENSE THE ECOSENSE LIGHTING INC. DF ECOSENSE LIGHTING INC. RISE", SLIM COVE", FREEDOM TO CREATE", MACRO", FLIP-TO-FLAT" ARE TRADEMARKS OF ECOSENSE LIGHTING INC.

20170908